



# MXT78 Selection





# SERIES MXT78 Selection

Our **Series MXT78 Selection** presents a perfect combination of materials that make it a system with some excellent thermal and acoustic performances.

Thanks to its powerful glazing capacity and the solidity of its profiles this window is the perfect complement for those projects where excellence plays a major role.

## PERFORMANCES:

**Profile thermal insulation:** 1,25 W/m<sup>2</sup> .K

**Acoustic insulation:** 34 dB (-1;-4)

(glazin 4-14-4-14-4 mm.)

**Air resistance:** Class 4

**Water permeability:** Class E1050

**Wind resistance:** Class C5

## TECHNICAL FEATURES:

**Sash section:** 93 x 80 mm.

**Frame section:** 88 mm. (no rolling shutter)  
128, 148, 161 mm. (with rolling shutter)

**Glazing thickness:** 40 or 48 mm. (triple glazing)

**Triple (EPDM) rubber gasket**


**Hardware channel axle:** 13 mm.

**Electro welded exterior aluminium:** as an option



$\psi$	$U_g$	$U_w$
0,06	2	1,92
0,06	1,9	1,86
0,06	1,8	1,8
0,06	1,7	1,74
0,06	1,6	1,68
0,06	1,5	1,63
0,06	1,4	1,57
0,06	1,3	1,51
0,06	1,2	1,45
0,06	1,1	1,39
0,06	1	1,33
0,06	0,9	1,27
0,06	0,8	1,22
0,06	0,7	1,16
0,06	0,6	1,1
0,06	0,5	1,04

## SECTION:

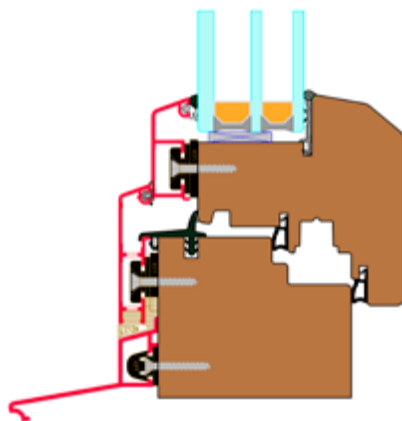

## TERMOGRAPHY:

