



MD68 Classic





SERIES MD68 Classic

A window system devised to comply with the highest levels of quality.

Our **Series MD68 Classic** has been conceived as a functional product introducing a deep technical development so as to also obtain some excellent laboratory achievements.

PERFORMANCES:

Profile thermal insulation: 1,36 W/m² .K

Acoustic insulation: 33 dB (-1;-6)

(glazin 4-18-4 mm.)

Air resistance: Class 4

Water permeability: Class E750

Wind resistance: Class C5

TECHNICAL FEATURES:

Sash section: 68 x 80 mm.

Frame section: 68, 105 mm. (no rolling shutter)
105, 120, 140 mm. (with rolling shutter)

Glazing thickness: 26 or 30 mm.


Double (EPDM) rubber gasket

Hardware channel axle: 13 mm.



Ψ	U_g	U_w
0,06	2,7	2,38
0,06	2,6	2,32
0,06	2,5	2,28
0,06	2,4	2,2
0,06	2,3	2,14
0,06	2,2	2,08
0,06	2,1	2,02
0,06	2	1,97
0,06	1,9	1,91
0,06	1,8	1,85
0,06	1,7	1,79
0,06	1,6	1,73
0,06	1,5	1,67
0,06	1,4	1,61
0,06	1,3	1,55
0,06	1,2	1,49

SECTION:

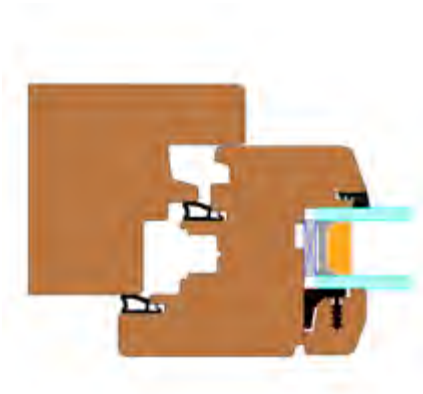

TERMOGRAPHY:

