



MXT92 Energy



4D PROYECTOS



SERIES MXT92 Energy

Our **Series MXT92 Energy** can be considered as the highest-rank window within the different options of our wood-aluminium system portfolio.

Triple glazing including two air chambers plus the high performances delivered by the 92 mm. thick wood sash confer to this series some features that make it the best window in the market.

PERFORMANCES:

Profile thermal insulation: 1,11 W/m² .K

Acoustic insulation: 34 dB (-1:-7)

(glazin 4-20-4-20-4 mm.)

Air resistance: Class 4

Water permeability: Class E1350

Wind resistance: Class C5

TECHNICAL FEATURES:

Sash section: 107 x 80 mm.

Frame section: 102 mm. (no rolling shutter)
142, 162, 175 mm. (with rolling shutter)

Glazing thickness: 54 mm. (triple glazing)

Triple (EPDM) rubber gasket


Hardware channel axle: 13 mm.

Electro welded exterior aluminium: as an option



Ψ	U_g	U_w
0,06	2	1,85
0,06	1,9	1,8
0,06	1,8	1,74
0,06	1,7	1,68
0,06	1,6	1,62
0,06	1,5	1,56
0,06	1,4	1,5
0,06	1,3	1,44
0,06	1,2	1,39
0,06	1,1	1,33
0,06	1	1,27
0,06	0,9	1,21
0,06	0,8	1,15
0,06	0,7	1,09
0,06	0,6	1,04
0,06	0,5	0,98

SECTION:

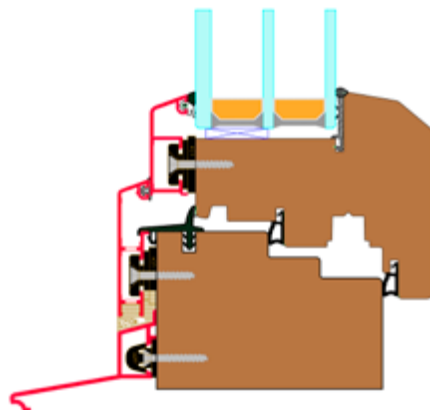

TERMOGRAPHY:

